



For all wall types

# Feature Brick Lintels

Intermediate gussets to support the outer leaf are added as required

## Medium Duty Example

shown: CC24-100/75/100 FB  
(temporary base not shown)

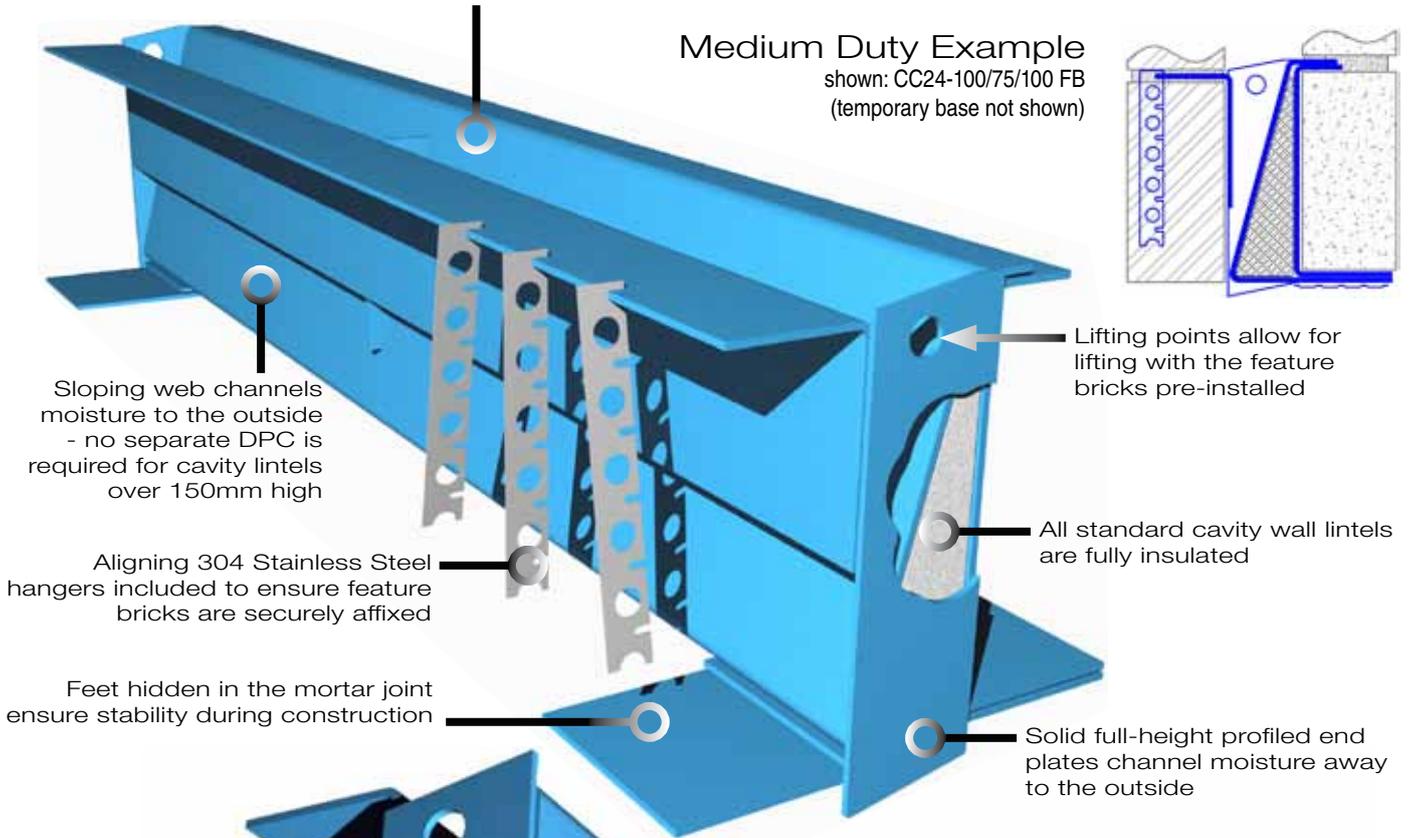

Sloping web channels  
moisture to the outside  
- no separate DPC is  
required for cavity lintels  
over 150mm high

Aligning 304 Stainless Steel  
hangers included to ensure feature  
bricks are securely affixed

Feet hidden in the mortar joint  
ensure stability during construction


Lifting points allow for  
lifting with the feature  
bricks pre-installed

All standard cavity wall lintels  
are fully insulated

Solid full-height profiled end  
plates channel moisture away  
to the outside


Steps and other  
optional features are  
also available in feature  
brick versions

Plaster key is still  
fitted as standard  
on the inner



## Light Duty Example with Step

shown: CA16-100/80/125 S50/FB

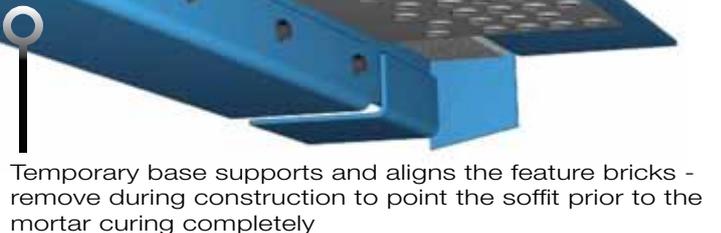

Temporary base supports and aligns the feature bricks -  
remove during construction to point the soffit prior to the  
mortar curing completely

# Feature Brick Lintels

What is "feature brick"?


"Feature Brick" lintels conceal the outer leaf support above the first course of masonry, so the lintel is completely hidden; only the brick is visible at the soffit!

Why use feature brick?

The resulting opening features both the natural aesthetic appeal of masonry & the superior structural strength & regulatory compliance of a hidden steel lintel.

How to order feature brick:

A "Feature Brick" lintel is not a special type of lintel, but rather an option available on most standard lintels, including arches - select your lintel and suffix with "FB"!





## ← CAVITY WALL LINTELS →

The feature brick option is available on all cavity wall lintels, simply specify your lintel as normal and suffix "FB".

CA16-100/80/125 FB  
(centre section, as installed)

CC24-100/80/100 S50/FB  
(centre section, as installed)





## ← LINTELS FOR DOUBLE SOLID WALLS →

The feature brick option is available on all "DC" & "DB" type lintels, a typical example of each is shown here; specify as normal and suffix "FB".

DB23-100/100 FB  
(centre section, as installed)

DC23-100/100 FB  
(centre section, as installed)



## SINGLE LEAF SOLID WALL LINTELS




The feature brick option is available for all "SC" & "SLB" type lintels, an SC example is shown left

SC23-100 FB  
(centre sect. with temp. base)

## OUTER LEAF LINTELS

The feature brick option is even available for outer leaf lintels! Most types can be accommodated, an OLH is shown right:

OLH27-100/90 FB  
(centre sect. with temp. base)

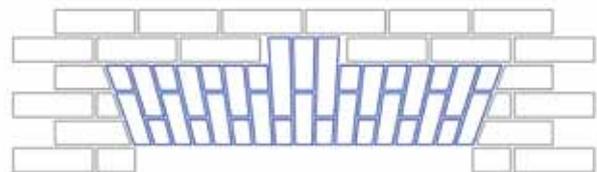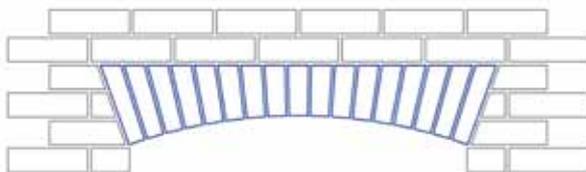

Even Arches and other architectural features can be accommodated in feature brick!

