



## The advantages

# CD25 Lintel Range

The CD25 is the strongest 100% stainless steel lintel available in the market today. We can produce even stronger stainless steel lintels as specials, such as the CD32 on request.

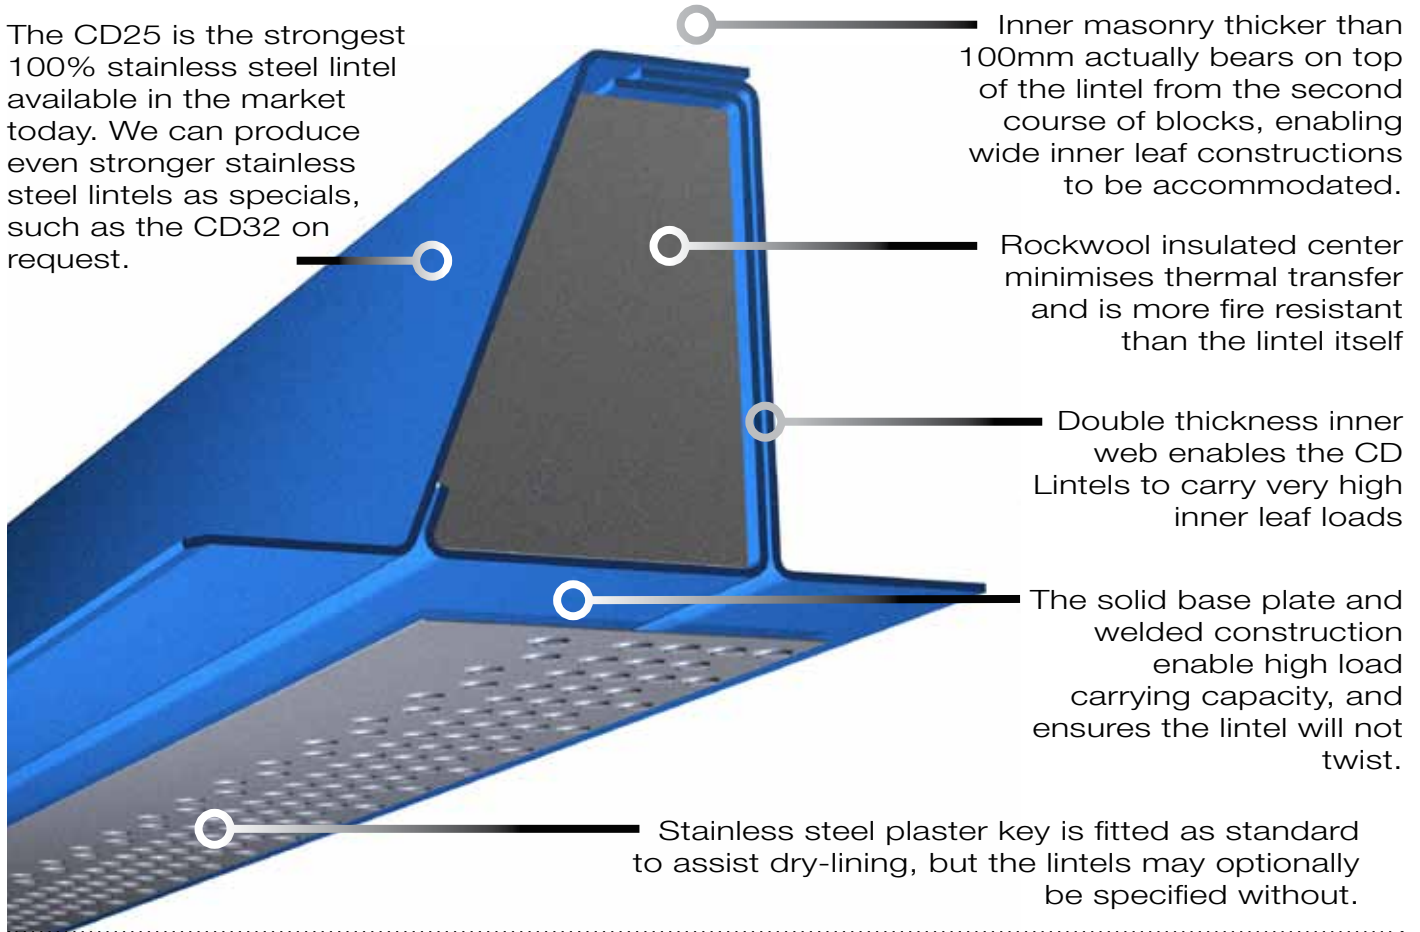

The CD25 Lintel takes one of two forms depending on the wall dimensions.

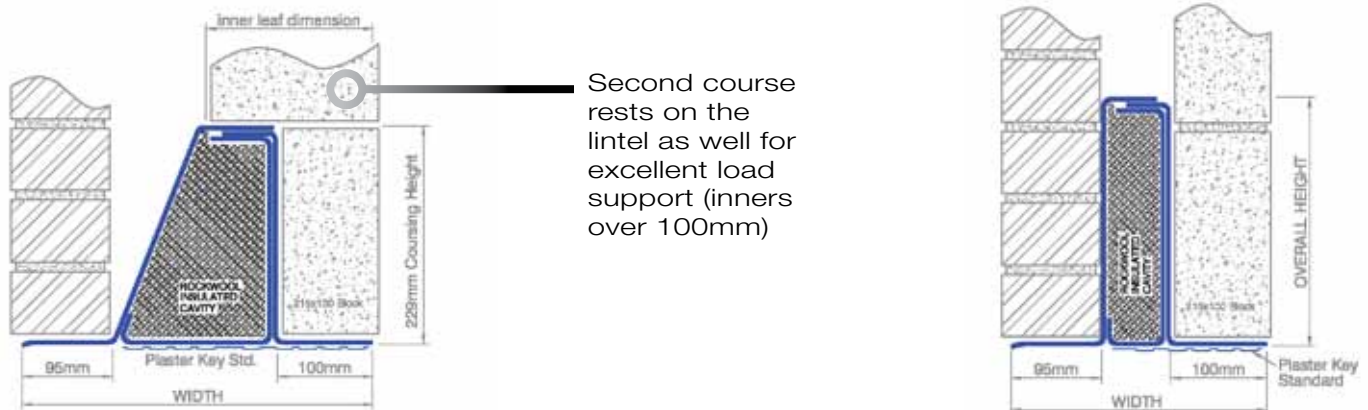

### Form Type 1:

For typical wall constructions with larger cavities and wider inner leaves, the outer flange of the lintel slopes, eliminating the requirement for a separate DPC. \*These are supplied with separate adhesive stop-ends. For welded steel stop ends, specify 'LINTRAY®'

All inners of block sizes over 100mm require one course of 100mm blocks to be laid on the lintel, with the next course of normal width bearing on both the lintel itself and the previous course as shown above.

### Form Type 2:

For wall constructions with smaller cavities and narrower inners, thus leaving less room for the lintel. (more unusual) In some cases, the lintel will have extra depth to achieve the required strength. This form may be used for some wall constructions with inners over 100mm wide, but narrow cavities, the second course bearing on the lintel as for type 1.

Form type 2 lintels require a separate DPC.

Many variations are possible, including bolted connections & other specially fabricated features - All standard in LDX2101® Stainless Steel. Call 01206 79 2001 to discuss or visit [www.stainless-lintels.co.uk](http://www.stainless-lintels.co.uk)